


# QT-AT-FL adapter grommets

based on QT large, for M23 square flange / IP54

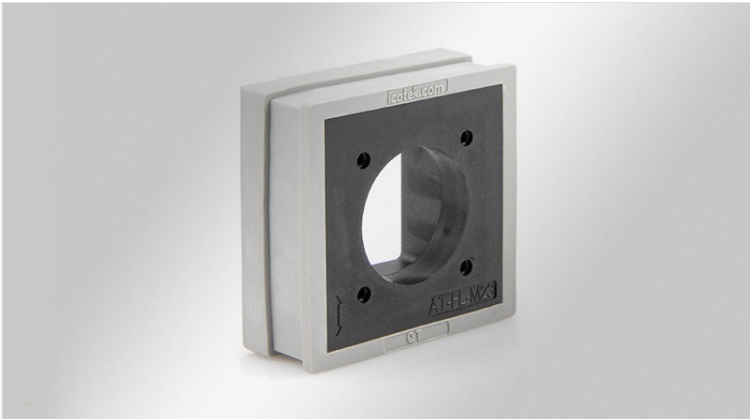

The grommet QT-AT-FL is constructed on the basis of a large QT cable grommet. The polyamide body is moulded with elastomer. All square flanges with dimensions 19.8 x 19.8 mm (M23) can be integrated.

The insertion of QT-AT-FL into an icotek cable entry frame enables the routing of cables with and without connectors in combination with the creation of interfaces for M23 connectors within one cable entry system. Separate cut-outs for connectors are no longer necessary.

QT-AT-FL provides ingress protection of up to IP54 (depending on the used flange and connector).

IP54

REACH COMPLIANCE

C<sub>RU</sub> US

Made in Germany

HL3

EN 45545-2

ECOLAB

certified

UV

ISO 4892-2A

RoHS

compliant


## Specifications

|                       |                              |
|-----------------------|------------------------------|
| IP rating (EN 60529)  | IP54                         |
| Material              | Elastomer<br>Body: Polyamide |
| Flame class           | UL94-V0, self-extinguishing  |
| Operating temperature | -40 C° to 90 C°              |
| Properties            | silicone free, halogen free  |

## Advantages & benefits

- By utilising the QT-AT-FL grommet, connectors can be integrated directly into the cable entry frame
- Separate cut-outs for connectors are no longer necessary
- Space-saving solution
- Cost-saving assembly

## Product types & sizes

|                                                                                    |                  |               |
|------------------------------------------------------------------------------------|------------------|---------------|
| QT-AT-FL-M23                                                                       | Part No.         | 42608         |
|  | EAN              | 4251269323775 |
|                                                                                    | Package quantity | 10            |
|                                                                                    | Length           | 40 mm         |
|                                                                                    | Width            | 39 mm         |
|                                                                                    | Height           | 17 mm         |
|                                                                                    | Mounting height  | 2 mm          |